
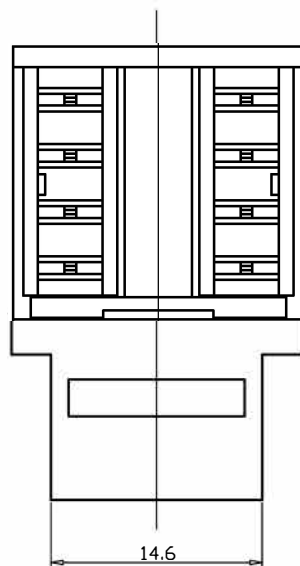


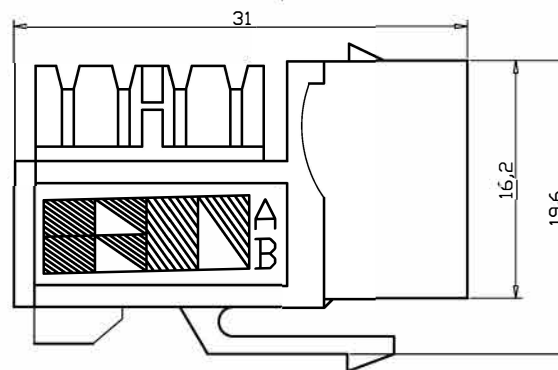
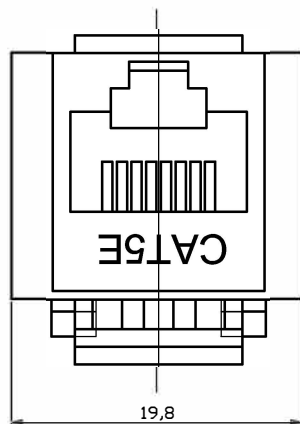


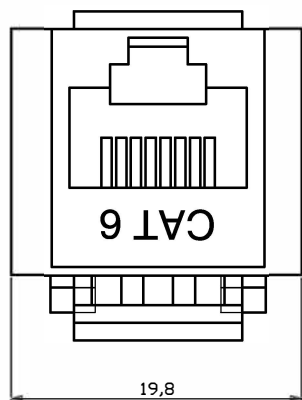

Electrical schematic
T568A

white/blue	↔	5
blue	↔	4
white/orange	↔	3
orange	↔	6
white/green	↔	1
green	↔	2
white/brown	↔	7
brown	↔	8

Electrical schematic
T568B

white/blue	↔	5
blue	↔	4
white/orange	↔	1
orange	↔	2
white/green	↔	3
green	↔	6
white/brown	↔	7
brown	↔	8

Key Specifications/Special Features

- 1.Operation temperature:-40℃ to 60℃, Relative humidity: 85%(30℃), Air pressure: 70-106Kpa.
- 2.Insertion force: 2 contacts:350g, 4 contacts:500g, 6 contacts:750g, 8 contacts:900g,
- 3.IDC: phosphor bronze and silver plating (20~50uinch), suitable diameter 0.4-0.6mm, durability 200 cycles ;
- 4.Contact pin: phosphor bronze and gold plating (20~50uinch), mating durability not less than 750 cycles ;
- 5.Anti-burn performance: plastic made from PPO and PC or PBT(UL94V-0), meeting the international standard ;
- 6.Intermediate resistance: no more than 20m ohm in normal atmosphere pressure (not including bulk resistor) ;
- 7.Insulated resistance: no less than 1,000M ohm in normal atmosphere pressure ;
- 8.Intensity of anti-current: DC 1,000V (AC,700V), no puncture and flash-over phenomenon in one minute ;
- 9.Retention strength: 7.7kg between jack and plug.
- 10.Label: clear label to ensure easy to management ;
- 11.Standard: designed by international ISO/IEC11801 and TIA/EIA568 ;

TITLE:			 Shenzhen Copperled Technology Co.,Ltd			
	INCH	MM				
.X	.015	.30	TITLE: Keystone Jack			
.XX	.010	.10				
.XXX	.005	.05				
DRAWN BY	MA		P/N: CL-KJ-C505			
CHECK BY			SCALE	1:1		REV
			UNIT	MM		
APPD BY			SHEET	1/1	DWG NO:	
			DATE	2017/06/05		