



Presentation

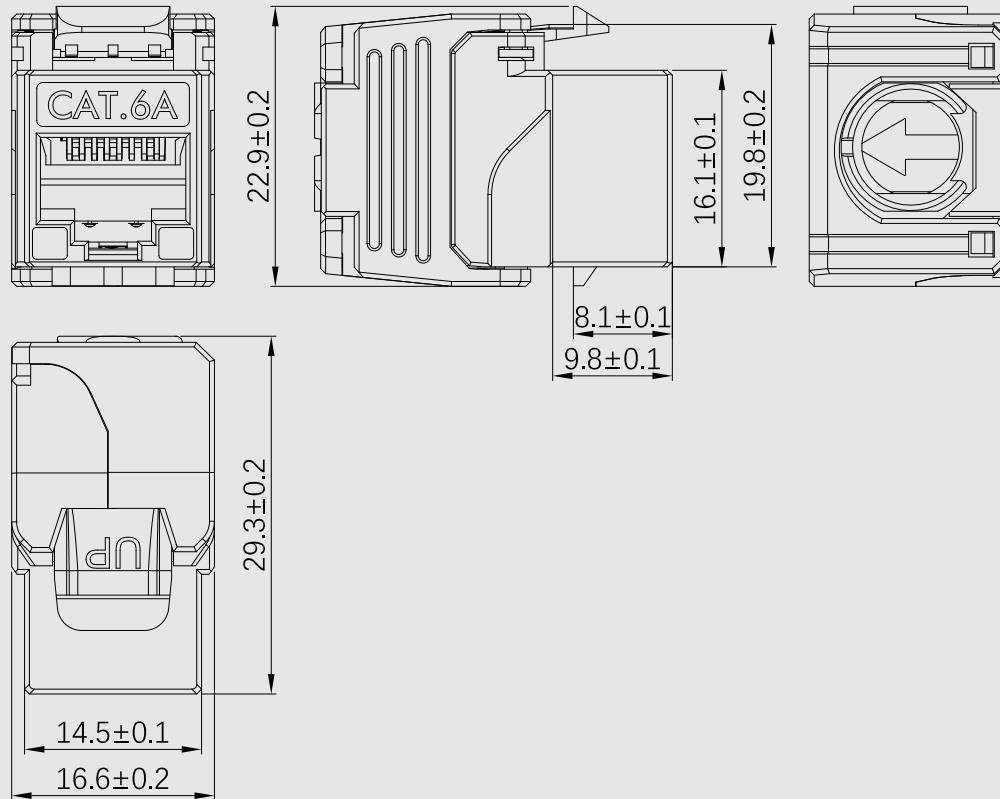

Photo

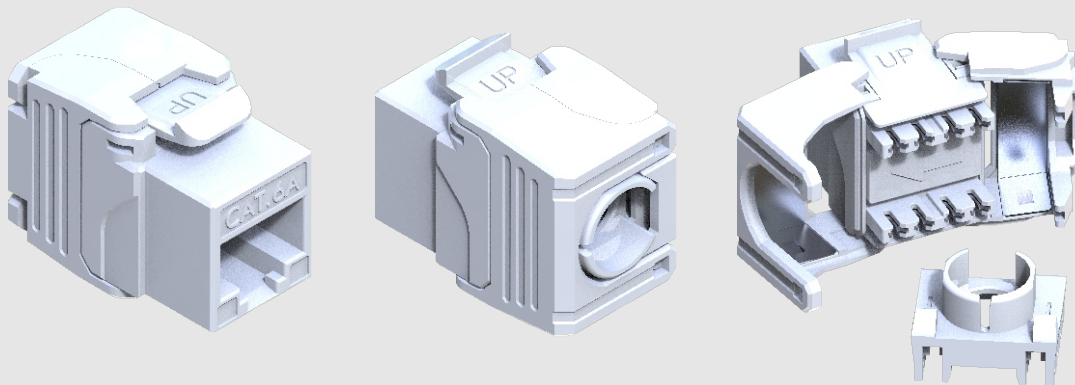

Electrical

Current Rating:	1.5 Amps
Insulation Resistance:	$\geq 500 \text{ M}\Omega$
Contact Resistance:	$\leq 20 \text{ m}\Omega$
DC Resistance:	$\leq 0.3 \Omega$
DC/AC Volt Endurance:	DC1000V/AC750V 1min

Mechanical

Mating cycles : 750 cycles minimum
 IDC mating cycles : 20 cycles minimum
 Operating temperature : -10~60°C
 Operating humidity : 10%~90%RH
 Storage temperature : -40°C TO 68°C

Physicals

Plastic Parts: High quality engineering plastic
 PCB: FR-4, 1.2mm Thickness
 Jack Wire: 0.35 mm Phosphor bronze gold over nickel plating
 IDC conductor: 0.5mm Phosphor bronze, tin-plating
 Contact compatibility :accommodate 23 to 26 AWG solid
 TIA Cat.6A Perm.Link Test: Worst Pair NEXT Headroom $\geq 3.0\text{dB}$

Standards Verification

ANSI/TIA-568.2-D-2018;
 ISO/IEC 11801-1-2017;
 YDT 926.3-2024 ;
 ISO/IEC 60603-7-41
 RoHS Directive 2011/65/EU。